

WOODS

TILLAGE AND SEEDING



SUPERIOR DESIGN ■ SUPERIOR DURABILITY ■ SUPERIOR STYLE

THERE'S NOTHING LIKE THE SMELL OF FRESH TURNED DIRT AND THE HOPE OF NEWLY PLANTED SEEDS

TABLE OF CONTENTS

QUICK HITCH 3

Woods Quick Hitch makes easy work of changing from one 3-point attachment to another.

ROTARY TILLERS 4

Woods' line of forward and reverse rotation tillers couple the best design features with outstanding performance for your landscaping and gardening projects.

DISC HARROWS 6

Whether breaking ground or tilling existing plots, Woods disc harrows are a rugged must-have tool for gardens, nurseries, food plots and small-acreage farms.

CULTIPACKERS 7

This easy to use seed bed tool improves seed-to-soil contact for higher germination rates.

SEEDERS 8

The versatile family of seeders come in a range of sizes and can handle primary seeding, over-seeding, inter-seeding, and applications such as native grasses and food plots.

Your Woods Dealer

Our products are distributed and backed by a network of authorized Woods dealers because we believe in the expertise and service you can only get from an experienced, specialized retailer. From the moment you walk into the showroom and for years to come, your Woods dealer will help you select the right equipment and offer follow-up service and maintenance.

To find your nearest store visit us at woodsequipment.com or call 800-319-6637.

Woods

GENUINE PARTS



Since our founding in 1946, Woods has built a strong reputation for manufacturing equipment with superior design and durability. So when it comes to keeping your equipment in top condition, there's only one choice. Woods Genuine Parts are designed for the best performance on your Woods equipment, not simply to "fit." We stand behind the quality of our replacement parts. And, our network of knowledgeable dealers is essential to not only get you the parts you need today, but to maintain your machine and keep you going for years to come.

3 TIPS FOR CHOOSING THE RIGHT ATTACHMENT

- 1. Consider the work and frequency.** Your job and how often you do it will determine the right attachment. For example, how many acres do you mow and how often? Do you need a finish mower for a fine cut or a rotary cutter for tall grass and brush?
- 2. Match the attachment to your tractor horsepower.** Your tractor needs enough horsepower to properly run the attachment and maximize its performance, but not too much horsepower or you could damage the implement. Match the "hp range" of your tractor and the equipment.
- 3. Ensure the attachment is wider than your tractor's rear tires.** When mowing and working the dirt it's best to have the implement cover the rear tire tracks, especially when trimming and working along edges. It leaves a smoother and more uniform appearance.

QUICK HITCH

Woods quick hitches make easy work of changing from one 3-point attachment to another. When hooking up to many implements, you never have to leave the tractor because lower hooks automatically lock implement into place.

- Heavy-duty steel construction with adjustable top link bracket
- 7/8-inch diameter mounting pins and adapter bushings
- Lower arms lock automatically
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch compatibility



SPECIFICATIONS	TQH1	TQH2
Tractor Hitch	CAT 1	CAT 2
Width	27.25"	27.25"
Approximate Weight	75 lbs	75 lbs
Mounting Pin Diameter	.875"	.875"
Adapter Bushing Diameter	1.125"	1.125"



ROTARY TILLERS

Woods' line of rotary tillers couples the best design features with outstanding performance for the discerning user. Our 30- and 40-series received the ASABE award for outstanding Innovation in Product or Systems Technology 2017.



▶ VIDEO

**TRACTOR HP RANGE:
12 - 35 HP**

30-Series Rotary Tillers

Models

RT42.30/RTR42.30 | 41-inch
RT48.30/RTR48.30 | 47-inch

**TRACTOR HP RANGE:
18 - 50 HP**

40-Series Rotary Tillers

Models

RT60.40/RTR60.40 | 59-inch
RT72.40/RTR72.40 | 71-inch

- Innovative double-flange design for blade support
- Gear-driven side drive – less maintenance than chain-driven units
- 3-year warranty on input gearbox (includes seals)
- Rugged, heat-treated c-shaped tines for deep penetration in the toughest soils
- Tapered tailgate removes furrow for a finished seedbed
- Sturdy tubular integrated parking stand for easy storage and setup
- 30- and 40-series models available as either forward or reverse rotation
- On initial pass reverse rotation tillers will often till deeper and faster than forward rotation models
- Slip clutch driveline protection is standard on all models
- Skid shoes standard

TRACTOR HP RANGE: 45 HP

Models

TC60/TCR60 | 60-inch

TC68/TCR68 | 68-inch

TC74/TCR74 | 74-inch

- Three-point hitch: CAT 1
- Specifically designed for compact tractors
- Sturdy rear tailgate evenly distributes dirt – leaves a smooth, flat seed bed
- Strong, cast iron gearbox withstands rugged use

Woods offers tillers in forward or reverse rotation in 42"–74" widths.

Forward rotation tillers are ideal for moist, wet, rocky, sandy or loose soil conditions. Reverse rotation tillers work best in non-rocky soil conditions. They deliver a smoother top layer of soil by allowing ground cover to travel over the rotor top first, then incorporating it back into the ground beneath a fresh new layer of dirt. More often than not, users can achieve an exceptional seed bed with fewer passes when using a reverse rotation tiller.



SPECIFICATIONS	RT42.30/ RTR42.30	RT48.30/ RTR48.30	RT60.40/ RTR60.40	RT72.40/ RTR72.40	TC60/ TCR60	TC68/ TCR68	TC74/ TCR74
Tractor PTO HP	12-30 hp	15-35 hp	18-40 hp	20-50 hp	20-45 hp		
Tractor Hitch	Limited CAT 1 & 1		CAT 1		Limited CAT 1 & CAT 1		
Working Width	41"	47"	59"	71"	60"	68"	74"
Overall Width	51"	57"	69"	81"	67"	75"	81"
Weight	478 / 484 lbs	502 / 508 lbs	570 / 578 lbs	621 / 630 lbs	597 / 604 lbs	634 / 641 lbs	665 / 672 lbs
Maximum Tilling Depth	7"				7.5"		
Drive Type	gearbox				#80 chain		
Total Number of Tines / Flanges	20 / 5	24 / 6	28 / 7	36 / 9	42 / 7	48 / 8	54 / 9
Number of Tines per Flange	4 C-type (6 optional)				6 C-type		
Rotor Speed	210 rpm				240 rpm		
Tractor PTO Speed	540 rpm						
PTO Driveline Protection	slip clutch						
Gearbox Housing	heavy-duty cast iron						
Gearbox Drain Plug	yes				yes		
Offset (left)	3" fixed		2.25" fixed		adjustable up to 15.5"	adjustable up to 19.5"	adjustable up to 22.5"
Quick-Hitch Compatible	yes						

DISC HARROWS

Built with high-strength U.S. steel, these rugged disc harrows carry Woods' reputation for durability and reliability. Plus, these new discs are easy to use due to innovative design features like individually adjustable disc gangs that reposition with a single pin.



▶ VIDEO

TRACTOR HP RANGE: UP TO 55 HP

Models

- DHS48** 48-inch
- DHS64** 64-inch
- DHS80** 80-inch

- Mud scrapers that prevent clogging, increase productivity
- Furrow fillers (DHS64, DHS80)

TRACTOR HP RANGE: UP TO 85 HP

Models

- DHM80** 80-inch
- DHM96** 96-inch

- Furrow fillers to reduce end ridges
- Rear drawbar for towing equipment
- Mud scrapers that prevent clogging, increase productivity



DHS64

SPECIFICATIONS	DHS48	DHS64	DHS80	DHM80	DHM96
Tractor Engine HP	up to 35 hp	25-45 hp	35-55 hp	45-75 hp	55-85 hp
Tractor Hitch	CAT 1, Lim. CAT 1, CAT 0 optional	CAT 1		CAT 1 & 2	
Width	48"	64"	80"		96"
Weight (depends on blade type)	390 lbs	508 lbs	590 lbs	845 lbs	960 lbs
Disc Blade Type	notched	notched; or combination smooth and notched			
Average Weight per Blade	33 lbs	36 lbs	33 lbs	47 lbs	44 lbs
Disc Diameter / Quantity	16" / 12	18" / 14	18" / 18	20" / 18	20" / 22
Disc Spacing	7.5" front and rear	9" front, 7.5" rear			
Gang Axle Diameter	1" square			1 1/8" square	
Frame Construction	3" x 3" tube and angle		3" x 3" tube and channel	3" x 3" tube	
ASABE Quick-Hitch Compatible	yes				

CULTIPACKERS

Woods' cultipacker is a high quality seed bed tool backed by our reputation for durability and reliability.


TRACTOR HP RANGE: 20 - 75 HP

Models

- C48T** 48-inch
- C72** 72-inch
- C84** 84-inch

- Attaches to ATVs, UTVs and tractors up to 75 hp
- Notched, cast-iron cultipacker wheels provide the perfect seed-to-soil contact to trap moisture for higher germination rates
- Flip-over hitch easily changes from towing to working the dirt
- Rugged frame and axle are designed for durability
- Greasable, triple-sealed bearings are easy to maintain and extend work life
- Tow tires and weight rack are standard on C48T model
- Parking stand is standard on C72 and C84 models; add optional tow kit and mud scrapers for greater versatility and productivity

SPECIFICATIONS	C48T	C72	C84
Tractor Engine HP	up to 30 hp	20-75 hp	
Hitch Type	pull-type	3-pt	
Hitch Category	2" ball	CAT 1 & 2	
Working Width	48"	72"	84"
Overall Width	67"	82"	94"
Length	58" (with tongue)	15.75" (3-pt hitch); 91.5" (with tongue)	
Weight	275 lbs	371 lbs	420 lbs
Cultipacker Wheel Quantity	21	32	37
Transport Tires (pneumatic)	standard (10" x 3.25")	optional (10" x 3.25")	
Weight Rack	standard	n/a	
Parking Stand	n/a	standard	
Mud Scrapers	n/a	optional	



▶ VIDEO

COMPACT SUPER SEEDERS

The Woods Compact Super Seeder is everything you need in one compact cultivation and planting package. In one pass you can prepare the seed bed, precisely drop seeds at two different depths, then firm the bed for improved germination.

TRACTOR HP RANGE:
15 - 35 HP

Model
CSS48 | 48-inch

- Three-point hitch: CAT 1/Limited CAT 1
- Working width 48 inches
- ATV/UTV minimum 350cc

TRACTOR HP RANGE:
20 - 45 HP

Model
CSS60 | 60-inch

- Three-point hitch: CAT 1/ Limited CAT 1
- Working width 60 inches
- ATV/UTV minimum 400cc


SPECIFICATIONS	CSS48	CSS60
Tractor Engine HP	15-35 hp	20-45 hp
Tractor Hitch	CAT 1/Limited CAT 1	
ATV/UTV Engine Size	minimum 350cc	minimum 400cc
Working Width	48"	60"
Overall Width	57"	69"
Weight with Seed, Depending upon Configuration (lbs)	395-679	487-810
Drive Type	ground-driven spiked roller	
Number of Seed Boxes Available	1 or 2	
Seed Metering	6 seed cups	8 seed cups
Seed Box Ratio	5.1:1 or 14.4:1	5.1:1 or 14.4:1
Cool Season Seed Box with Agitator	standard	
Cool Season Seed Box Capacity (bushel)	1	1.25
Legume Seed Box	optional	
Legume Seed Box Capacity (bushel)	1	1.25
Front Tool Choices	6 - 16" notched disc blade or spiked roller	8 - 16" notched disc blade or spiked roller
Calibration Tray	standard	
Crank Handle	standard	
Spring-loaded Trailing Cultipacker	optional	
Speed Ranges	turf seed range 0-700 lbs/acre (cool season); food plot range 0-30 lbs/acre (legume)	
Options	fast/slow chain drive, Quick Hitch bushings, mud scrapers, seed stop plates, highway lights, tow kit	
ASABE Quick Hitch	add hitch pin bushings to make CAT 1 quick-hitch compatible	

- Simultaneously plant two seed types at two different depths in one pass
- Precisely measure out seeds, reducing waste, plus enjoy the durability of metal (not plastic) meters
- Handle a wide range of seeds from Black-eyed Susans to corn
- Easily weave into narrow spaces and make tight turns to plant areas that may not be accessible with a larger tractor and planter
- Expect years of work from a rugged, Grade 80 steel body



VIDEO

Ideal for small-scale planting, such as food plots, lawns, gardens, wildflower meadows, waterways and roadways. Widths 48 or 60 inches and lighter weight so you can maneuver into formerly unreachable areas.

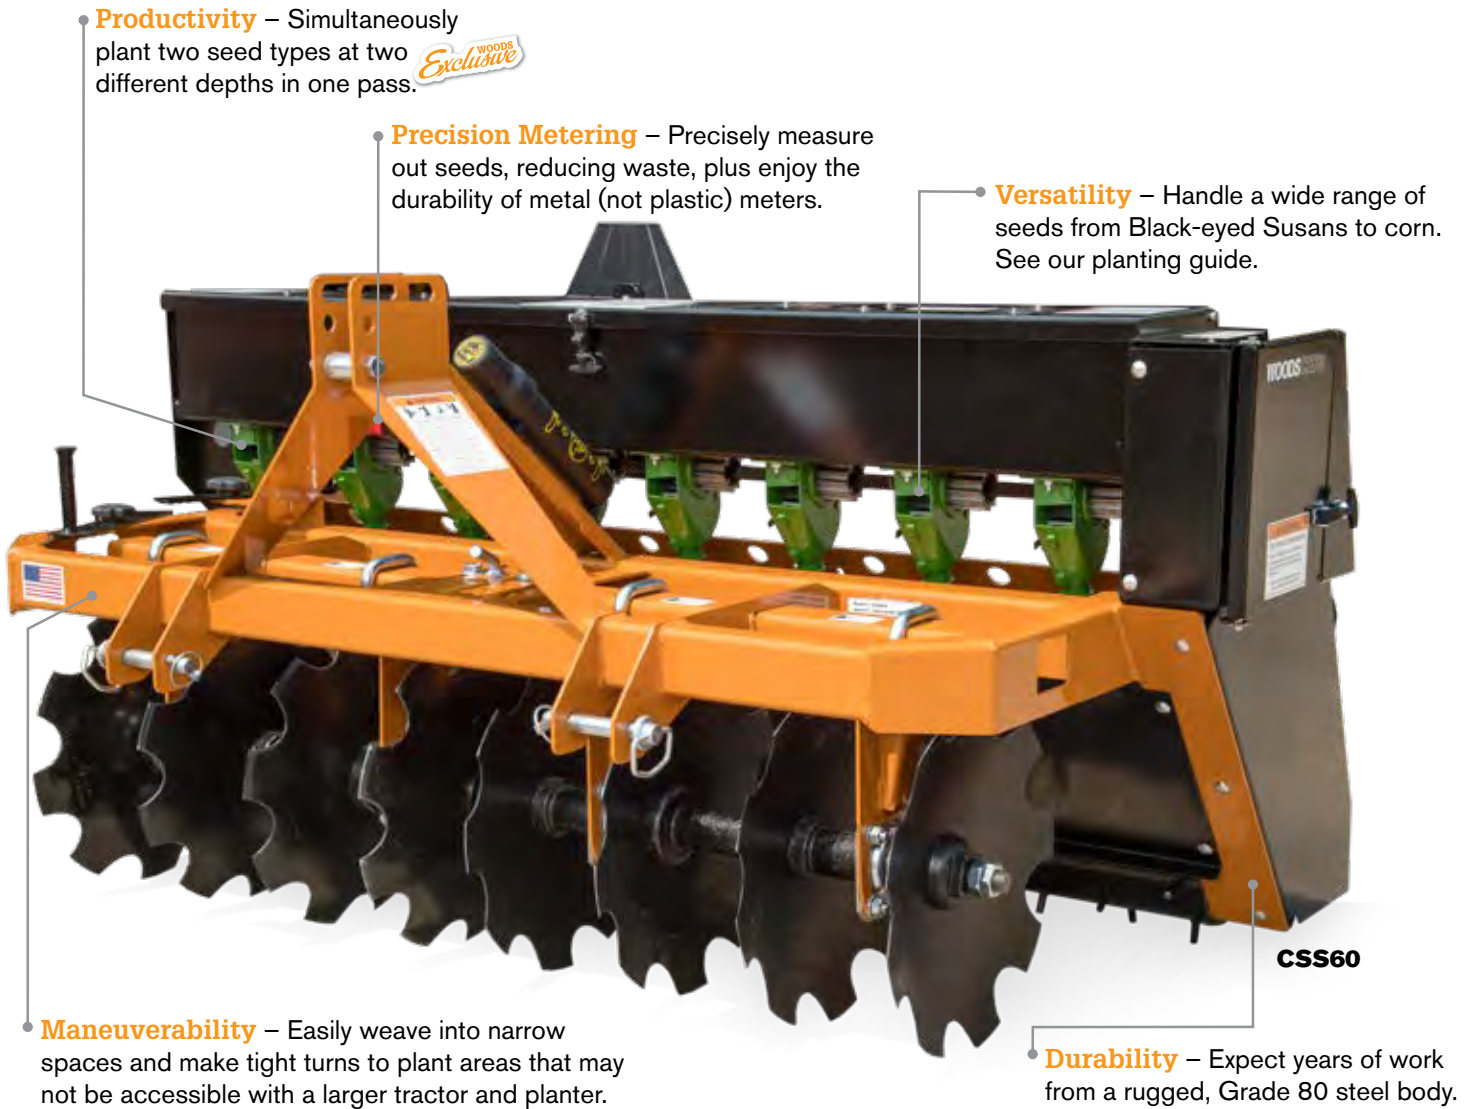

Additional Features Standard on Both Models

- The calibration system includes seed charts, a calibration tray and crank for accurate seed rates. *WOODS Exclusive*
- Windowed seed cups and clear PVC tubes allow you to easily monitor the flow of seeds.
- A quick and easy disconnect – pull a pin and one or both seed boxes stop to make it a tilling tool for preparing the ground. Till your seed bed, then replace the pin and engage the seeding function for a final pass. *WOODS Exclusive*

PRECISION SUPER SEEDERS

Versatile and flexible to easily handle primary seeding, over-seeding, and applications such as native grasses and food plots.

TRACTOR HP RANGE:
25 - 65 HP

TRACTOR HP RANGE:
35 - 125 HP

Models

PSS48 49-inch
PSS60 60-inch

Models

PSS72 72-inch
PSS84 84-inch

- Three seed box options — cool season, warm season, and legume — let you plant anything from rye and oats to prairie grasses, wild flowers, radishes and soybeans
- Efficient, one-pass planting of up to two seed types at one depth and legume seeds at a different depth with models equipped with three seed boxes
- All seed boxes can be engaged and disengaged independently with a single lynch pin — no tools required



PSS84

SPECIFICATIONS	PSS48	PSS60	PSS72	PSS84
Tractor Engine HP	25-45 hp	30-65 hp	35-85 hp	40-125 hp
Tractor Hitch	CAT 1 & 2			
Working Width	49"	60"	72"	84"
Weight with Seed, Depending upon Configuration (lbs)	1,189-2,580	1,389-3,023	1,721-3,698	1,938-4,214
Number of Seed Boxes Available	3			
Seed Metering	fluted and picker wheel			
Seed Cups (7" spacing)	7	8	10	12
Cool Season Seed Box Capacity (bushel)	4.00	5.00	6.00	7.00
Native Warm Season Seed Box Capacity (bushel)	5.00	6.25	7.50	8.75
Legume Seed Box Capacity (bushel)	1.00	1.25	1.50	1.75
Front Roller Spikes	(128) 0.5" x 2" carbide steel	(160) 0.5" x 2" carbide steel	(192) 0.5" x 2" carbide steel	(224) 0.5" x 2" carbide steel
Disc Blades (diameter/quantity)	16" (8)		18" (10)	18" (12)
Cast Iron or Nylon Trailing Cultipacker	Optional (9.5" diameter cast iron or 11" diameter nylon)			
Calibration Tray & Crank Handle	standard			
Mud Scrapers & Frame Platform	optional			
ASABE Quick-Hitch Compatible	yes			

FOOD PLOT SEEDERS

Plant up to three types of seed in one pass. Ideal for hunters and small acreage farmers seeding legumes and larger seeds.

**TRACTOR HP RANGE:
25 - 125 HP**

Models

FPS48	49-inch
FPS60	60-inch
FPS72	72-inch
FPS84	84-inch

- Three seed box choices — one cool season and two legume — can plant a variety of seeds like alfalfa, clover, corn, sorghum, soybeans, turnips and wheat
- A trailing cultipacker firms the seed bed for perfect seed-to-soil contact that's ready to trap moisture for germination
- Plant cool season seeds, in rows, at a deeper depth while evenly broadcasting up to two types of legume seeds at a shallow depth — all in one pass



▶ VIDEO



SPECIFICATIONS	FPS48	FPS60	FPS72	FPS84
Tractor Engine HP	25-45 hp	30-65 hp	35-85 hp	40-125 hp
Tractor Hitch	CAT 1 & 2			
Working Width	49"	60"	72"	84"
Weight with Seed, Depending upon Configuration (lbs)	1,042-2,098	1,181-2,436	1,463-2,990	1,629-3,426
Number of Seed Boxes Available	3			
Seed Box Ratio	1-speed			
Seed Cups (7" spacing)	7	8	10	12
Row Units	standard			
Cool Season Seed Box Capacity (bushel)	4.00	5.00	6.00	7.00
Legume Seed Box Capacity (bushel)	1.00	1.25	1.50	1.75
Disc Blades (diameter/quantity)	16" (8)		18" (10)	18" (12)
Cast Iron or Nylon Trailing Cultipacker	Optional (9.5" diameter cast iron or 11" diameter nylon)			
Calibration Tray & Crank Handle	standard			
Mud Scrapers & Frame Platform	optional			
ASABE Quick-Hitch Compatible	yes			

POWER TEAM **Got ideas?**
Join our customer panel at woodsequipment.com/power.
You have the power...

WOODS® | A Blount International Brand
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2019 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

