



Tilting 4 in 1 Bucket

Quality integrated Tilting 4 in 1 Bucket, provides the operator with full radial control of the cutting angle. Slim line tilt frame design minimizing additional weight & distance from the machine maximizing the full lift capacity of the machine.

Features:

- Fully inclosed, integrated valve blocks, with built in locking valve.
- Hydraulic ram geometry creates exceptional tilting forces.
- Hardened wear plate to increase wear life of moving parts of the tilt mechanism.
- Full range available from 1600mm up to 2130mm.

Optional:

- Tilt control 'Plug and Play' electrical wiring kit available.

Ideal Use:

- Grading, scraping, grappling, dozing dirt or material spreading most construction work.

Machine Suitability:

Available for most machine types (Multi Fit STD).







Tilting 4 in 1 Bucket



Mini 4 in 1 Bucket

ALSO AVAILABLE

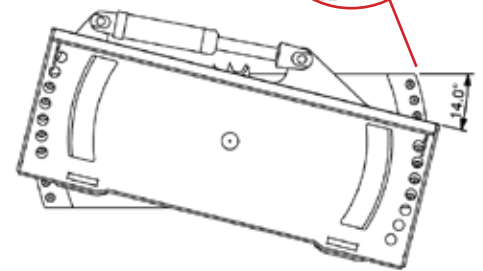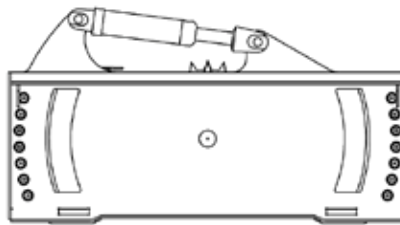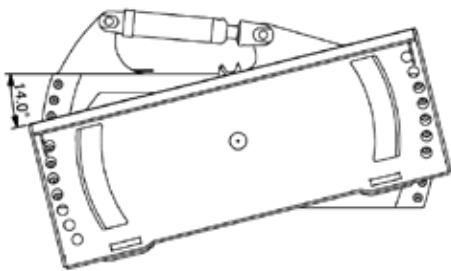

	1600	1650	1680	1727	1727HV	1800HV	1880HV	2000HV	2040HV	2130HV
Depth (Bucket Closed)	826	826	826	826	901	901	901	901	901	901
Bucket Cutting Width	1600	1650	1680	1727	1727	1800	1880	2000	2040	2130
Height	729	729	729	729	728	728	728	728	728	728
Weight (kgs)	492	500	510	520	527	550	565	572	579	590
ISO Struck Volume m ³	0.22	0.23	0.23	0.24	0.27	0.28	0.29	0.31	0.32	0.33
ISO Heaped Volume m ³	0.29	0.30	0.31	0.32	0.36	0.37	0.39	0.42	0.43	0.45