



## Rotary Tiller

The ideal attachment for ground preparation prior to planting.


Replaceable Dual rotation and bi-directional tynes allow for effective cultivation of up to 150mm depth. Unit has two position off-set mount for easier tilling close to obstacles.

## Features:

- Front edge is designed to level out uneven ground.
- Standard dual rotation with bi-directional tines.
- Replaceable abrasion resistant knife edge allows clean edging next to sod.
- Optional Scarifier assembly significantly increases productivity by combining the tractive effort and force of the loader with hydraulic horse power of the Tiller.

## Machine Suitability:

Skid Steer Loaders

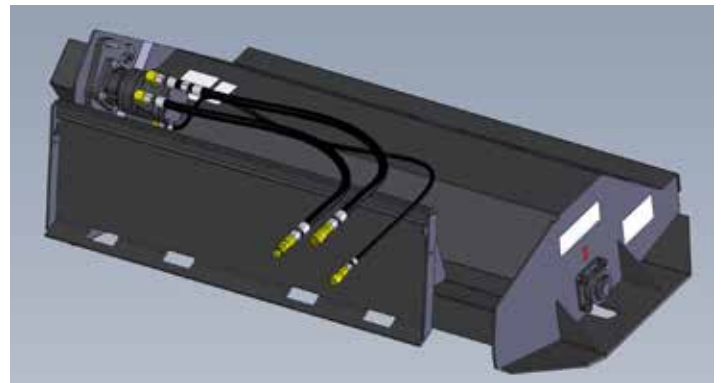

Exclusive two position offset mount that covers wheel tracks and allows tight cut next to obstacles.



Specification:	
Weight:	453Kg
Length (overall)	1220mm
Height (overall)	889mm
Width (overall)	1930mm
Width (operating)	1676mm
Tilling depth (Vary time)	100-150mm
Number of Tines	32
Number of Scarifier teeth (Optional)	5
Rec Fow Range - STD	65 – 110 lpm
Max Pressure	240 BAR