

## FEATURES

# ENVIRO 3000e

### Standard features

- Electric drive for accurate and even sowing with, a variation of sowing rates at the touch of a button
- Drawbar ram for easy adjustment
- Radar for accurate area count
- Weather skirts to cover the seeder units
- Sowing width equals transport width
- Mud guards
- Weigh kit
- Safety chains

### Options and accessories

- Rear tow hitch
- Stainless steel boxes
- Hydraulic harrow transport kit
- Third seed box
- Level lift drawbar ram
- Swivel tow eye

## DIMENSIONS & CAPACITIES

	19 RUN	23 RUN	27 RUN
Overall width (mm)	3225	3225	3225
Sowing width (mm)	3097	3105	3105
Overall length (mm)	4680	4680	4680
Height - in transport (mm)	2650	2650	2650
Row spacing (mm)	163	135	115
Weight - unladen (kg)	4320	4760	5200
Box capacity (L)	475	475	475



**DUNCAN AG NEW ZEALAND**  
 PO BOX 2018,  
 WASHDYKE 7941, TIMARU  
 PH: 0800 177 171  
 Email: admin@duncanag.co.nz  
 www.duncanag.com

**DUNCAN AG AUSTRALIA**  
 4B SILVERTON CLOSE,  
 NORTH LAVERTON, VICTORIA 3026  
 PH: 03 9314 9666  
 Email: admin@duncanag.com.au

Appointed Duncan Dealer


**DUNCAN**  
 Built to work.

In accordance with the company's policy of continuous improvement to its machines, alterations in specifications may be made without notice. The company accepts no responsibility for any discrepancies which may occur between specifications of its machines and the descriptions thereof contained in this publication.



# ENVIRO 3000e

**DUNCAN**  
 Built to work.

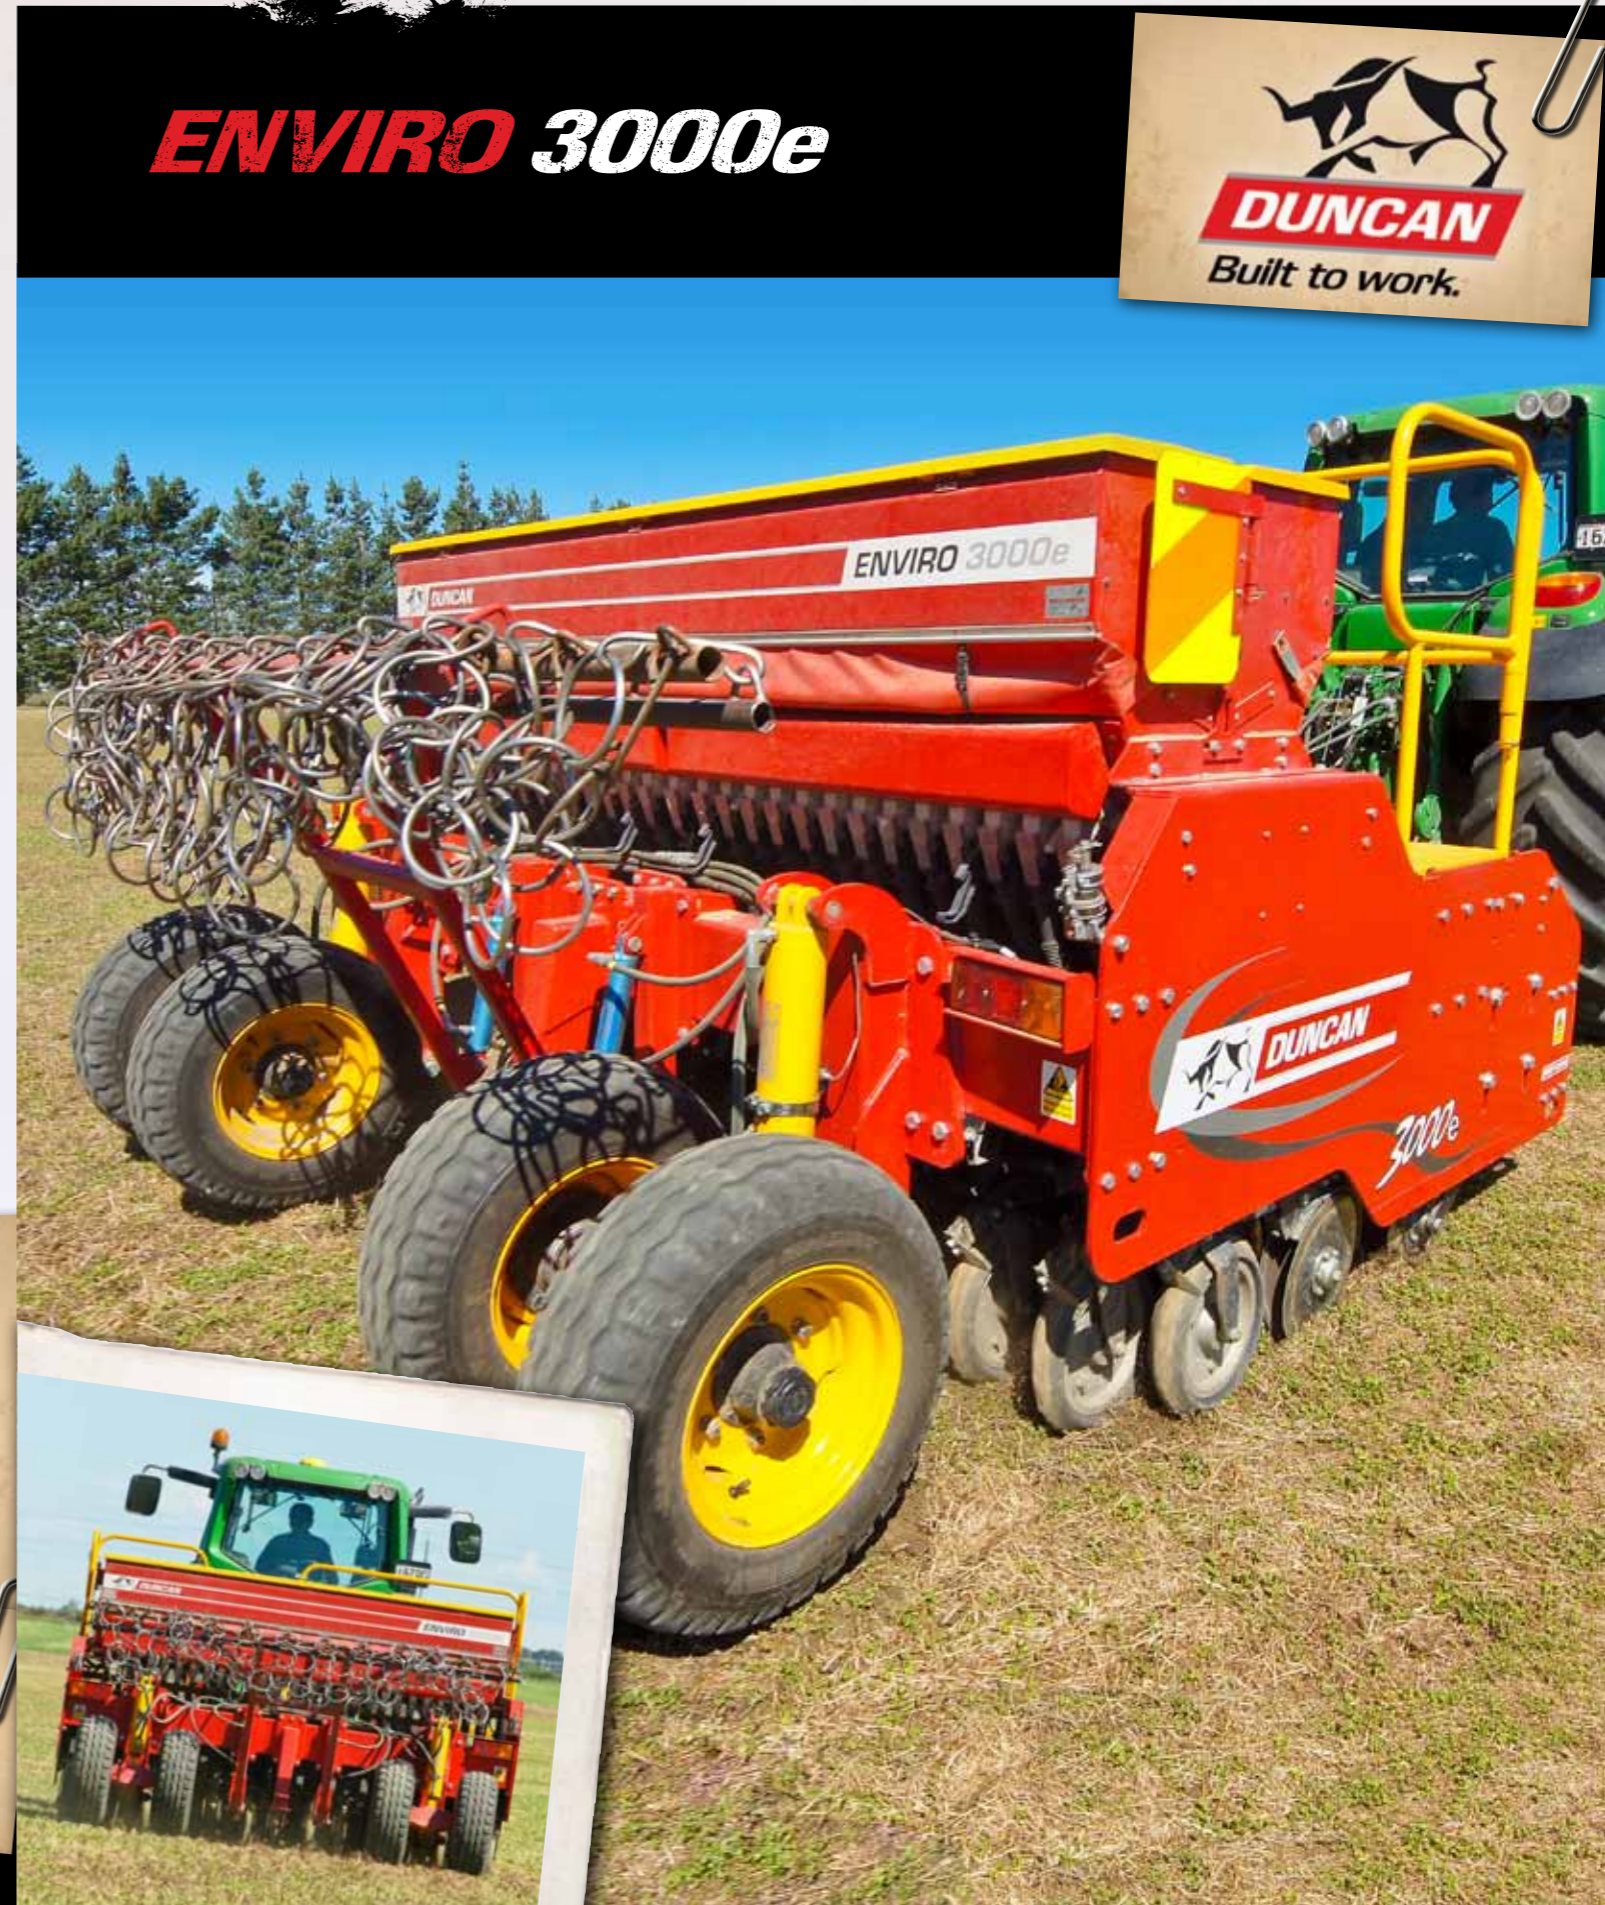

**BUILT TOUGH FOR LOCAL CONDITIONS**



**CONTINUOUS PROVEN R&D**



New parallelogram pivot bushes & new press wheel assemblies



Radar for an accurate area count



Electric drive, new technology for accurate and even seeding




Large loading platform with safety rails gives easy access and safety



Bin lids open to 110 degrees for better access



Boxes have vee bottoms for seed flow and agitator shaft to reduce seed compaction



Console for constant readouts of information



Hydraulic ram on the drawbar for easy adjustment



Seed is diverted into this tray for easy and accurate calibration



Access onto the drill is made easy with these steps

